

LED BULB LIGHT

world-class LED chips with superior lighting performance
Eco-friendly, no mercury, UV or IR radiation
Safely use, flicker free and instant start
High quality PC cover: high light emitting efficiency, no glare
Extremely long life 30000 Hours



LED SL-B Series



LED SL-B-12W

Product Features:



SMD2835 LED Chip

luminous maintenance > 95% at 30000hrs
brightness, super energy saving

Aluminum & Plastic Housing
Mechanical strength and fire retardant
Strong heat dissipation ability
Hermetically sealed and Complete insulation



Model	Power	Lumen	Voltage	CRI	Chip Type	Life time	PF	Angele	Size	Dimmable	DayLight
SL-B-7W	7W	650 lm	150-265V	≥80	SMD	30000	0.5	240°	60×60×110mm	NO	8500K
SL-B-9W	9W	850 lm	150-265V	≥80	SMD	30000	0.5	240°	60×60×110mm	NO	8500K
SL-B-12W	12W	1150 lm	150-265V	≥80	SMD	30000	0.5	240°	60×60×118mm	NO	8500K
SL-B-15W	15W	1400 lm	150-265V	≥80	SMD	30000	0.5	240°	70×70×140mm	NO	8500K
SL-B-18W	18W	1650 lm	150-265V	≥80	SMD	30000	0.5	240°	80×80×154mm	NO	8500K
SL-B-20W	20W	1850 lm	150-265V	≥80	SMD	30000	0.5	240°	95×95×170mm	NO	8500K
SL-B-24W	24W	2100 lm	150-265V	≥80	SMD	30000	0.5	240°	95×95×170mm	NO	8500K

LED SL-C Series




SL-C-6W

SL-CTC-6W

LED SL-C-6W

Product Features:

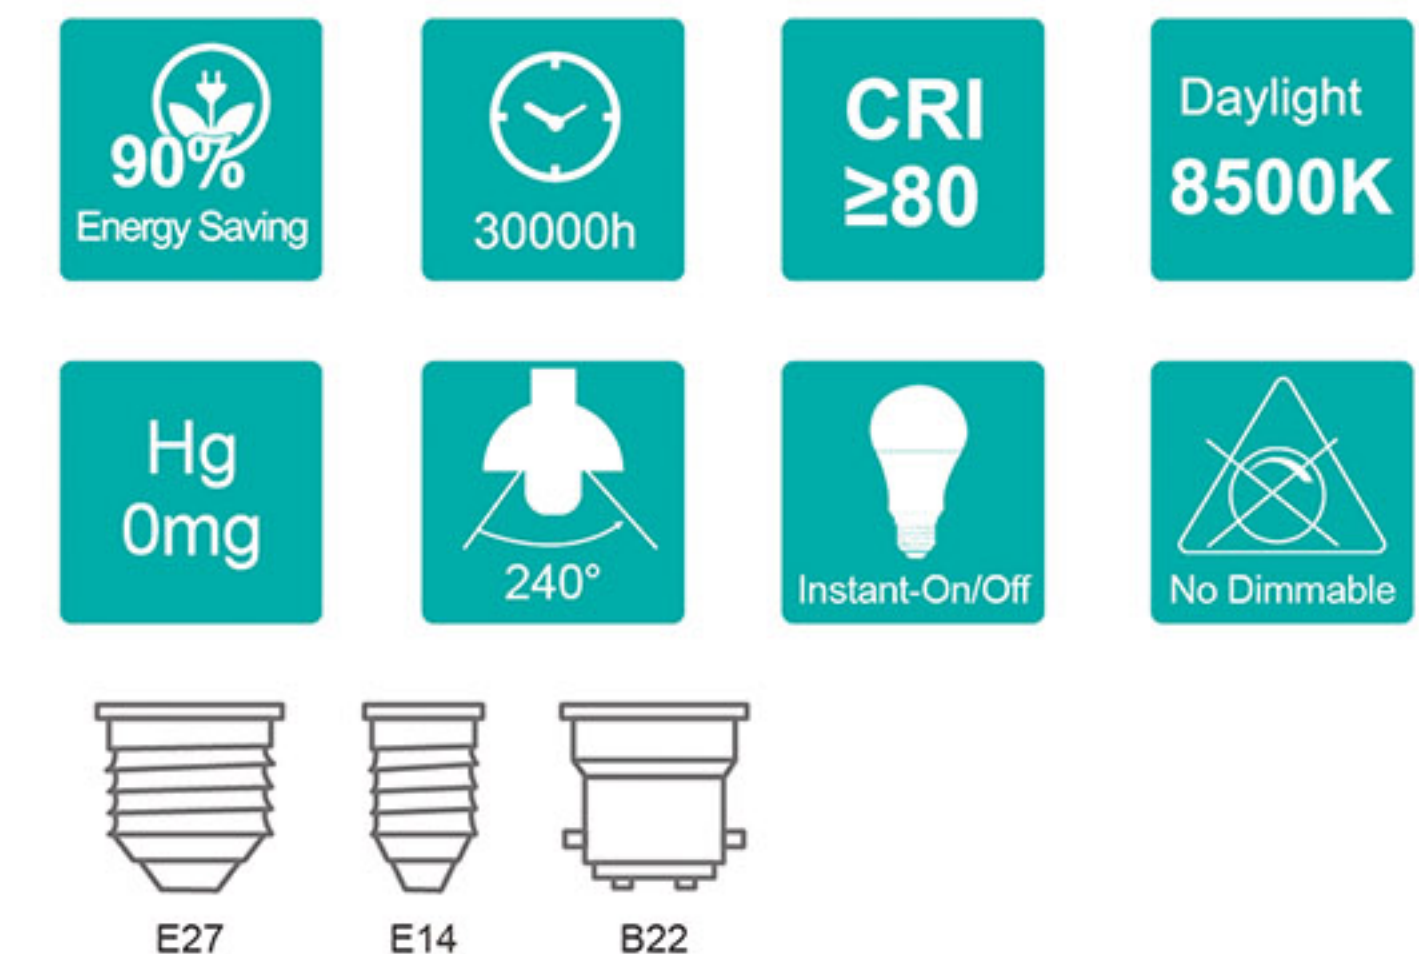

Model	Power	Lumen	Voltage	Chip Type	Life time	PF	Angele	Size	Dimmable	DayLight
SL-C-6W	6W	480 lm	150-265V	SMD	30000	0.5	220°	37×37×106mm	NO	8500K
SL-CF-6W	6W	530 lm	150-265V	SMD	30000	0.5	220°	37×37×106mm	NO	8500K
SL-CF-8W	8W	700 lm	150-265V	SMD	30000	0.5	220°	37×37×120mm	NO	8500K
SL-CTC-6W	6W	480 lm	150-265V	SMD	30000	0.5	220°	37×37×132mm	NO	8500K
SL-CTF-6W	6W	530 lm	150-265V	SMD	30000	0.5	220°	37×37×132mm	NO	8500K
SL-CTF-8W	8W	700 lm	150-265V	SMD	30000	0.5	220°	37×37×138mm	NO	8500K






LED SL-TB Series

Perfect shape and standard size
wide beam angle 240 degree, high brightness
Energy saving 80% than CFL light bulbs
Safely use, flicker free and instant start
Multiple color temperature available
Extremely long life 30000 Hours




LED SL-TB-20W

Product Features:



Size:

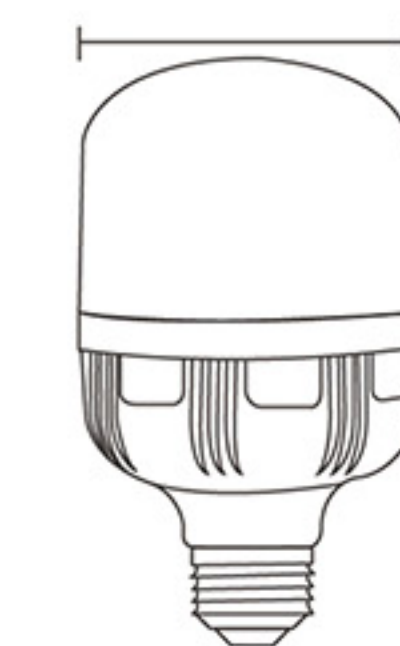

E27



E40

Model	Power	Lumen	Voltage	CRI	Chip Type	Life time	PF	Angle	Size	Dimmable	DayLight
SL-TB-20W	20W	1900 lm	150-265V	≥80	SMD	30000	0.5	240°	80×80×150mm	NO	8500K
SL-TB-30W	30W	2850 lm	150-265V	≥80	SMD	30000	0.5	240°	100×100×185mm	NO	8500K
SL-TB-40W	40W	3750 lm	150-265V	≥80	SMD	30000	0.5	240°	120×120×210mm	NO	8500K
SL-TB-50W	50W	4500 lm	150-265V	≥80	SMD	30000	0.5	240°	125×125×230mm	NO	8500K
SL-TB-60W	60W	5400 lm	150-265V	≥80	SMD	30000	0.5	240°	140×140×245mm	NO	8500K
SL-TB-80W	80W	7300 lm	150-265V	≥80	SMD	30000	0.5	240°	150×150×250mm	NO	8500K
SL-TB-100W	100W	8900 lm	150-265V	≥80	SMD	30000	0.5	240°	140×140×260mm	NO	8500K

