


LED PANEL-A Series

Advanced super longlife and stable driver
Professional thermal management
No noise ,no flicker
Aluminum body and ps cover
Eco-friendly.No mercury and other harmful materials



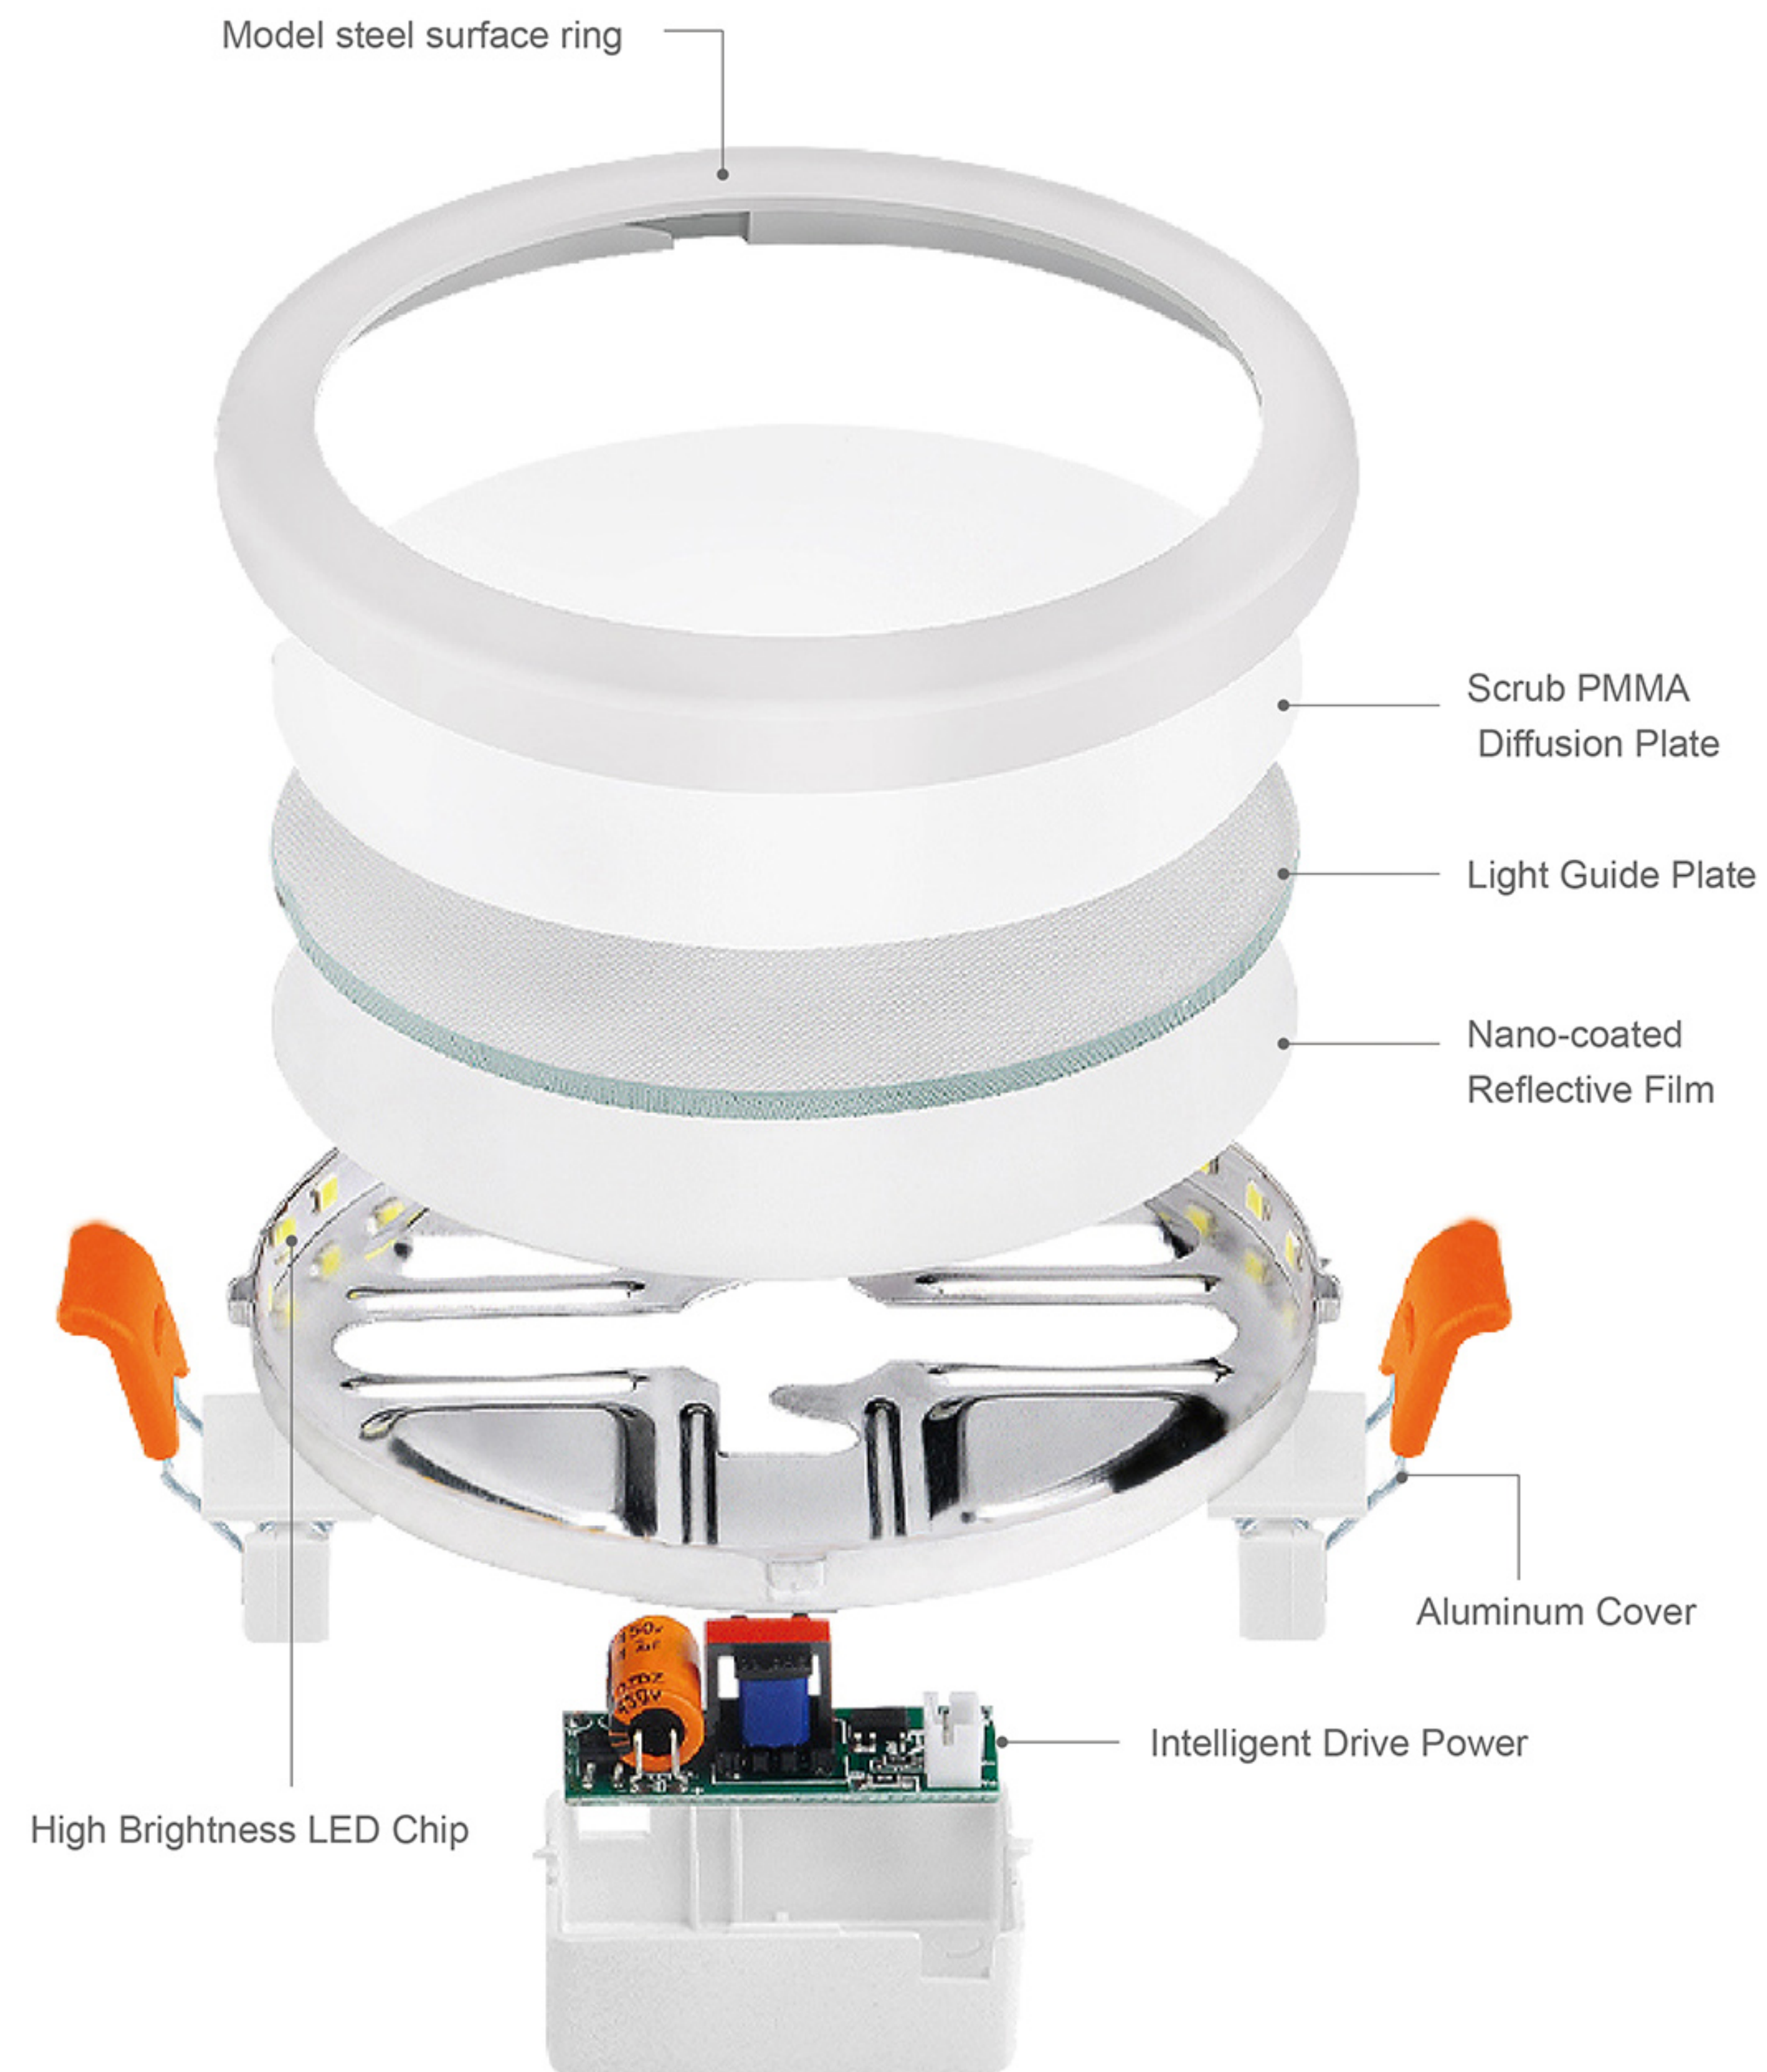

LED ADJUSTED PANEL LIGHT
SL-PLA



85-265V~

RA

>80



90%
Energy Saving



≥640lm



25000h




Eye-protection

PC Frames + Aluminum base



Adjustable Installation

Color Temperatures for your choices

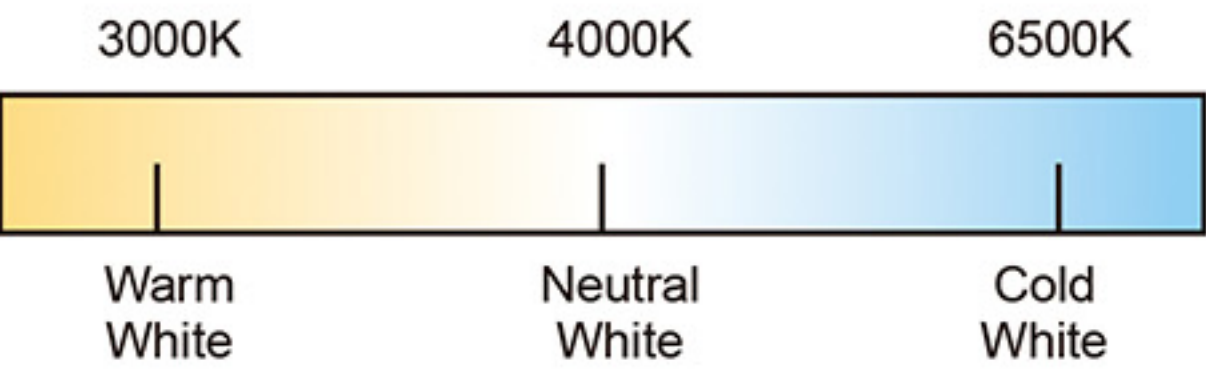

Model	Power	Lumen	Voltage	RA	Life time	SMD Chips	Lamp Size	Cut Hole Size
SL-PLA-6W	6W	480 lm	85-265V	≥80	25000	2835×30pcs	3" Φ100×H20mm	>5cm,<9cm / >2",<3.5"
SL-PLA-9W	9W	720 lm	85-265V	≥80	25000	2835×40pcs	4" Φ118×H20mm	>5cm,<10cm / >2",<4"
SL-PLA-15W	15W	1200 lm	85-265V	≥80	25000	2835×80pcs	5" Φ175×H20mm	>5cm,<16cm / >2",<6.3"
SL-PLA-20W	20W	1600 lm	85-265V	≥80	25000	2835×100pcs	8" Φ230×H20mm	>5cm,<10cm / >2",<8.3"



LED ADJUSTED PANEL LIGHT
SL-PLAS



85-265V~

RA

>80



90%
Energy Saving



≥640lm



25000h




Eye-protection

PC Frames + Aluminum base



Adjustable Installation

Color Temperatures for your choices

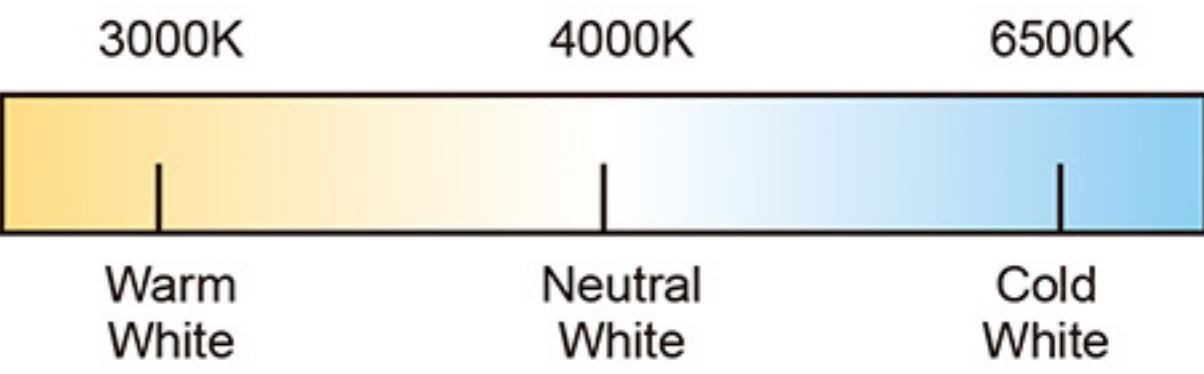

Model	Power	Lumen	Voltage	RA	Life time	SMD Chips	Lamp Size	Cut Hole Size
SL-PLAS-6W	6W	480 lm	85-265V	≥80	25000	2835×30pcs	3" Φ100×H20mm	>5cm,<9cm / >2",<3.5"
SL-PLAS-9W	9W	720 lm	85-265V	≥80	25000	2835×40pcs	4" Φ118×H20mm	>5cm,<10cm / >2",<4"
SL-PLAS-15W	15W	1200 lm	85-265V	≥80	25000	2835×80pcs	5" Φ175×H20mm	>5cm,<16cm / >2",<6.3"
SL-PLAS-20W	20W	1600 lm	85-265V	≥80	25000	2835×100pcs	8" Φ230×H20mm	>5cm,<10cm / >2",<8.3"




Frosted PVC light frame,
environmental protection material

PMMA diffuser plate with
good quality and good
even goes pervious to light

2835 ultra bright chip technology,
long life, good consistency

Purity aluminum materials
anti-corrosion

Drive with intelligent
LED dedicated driver ic

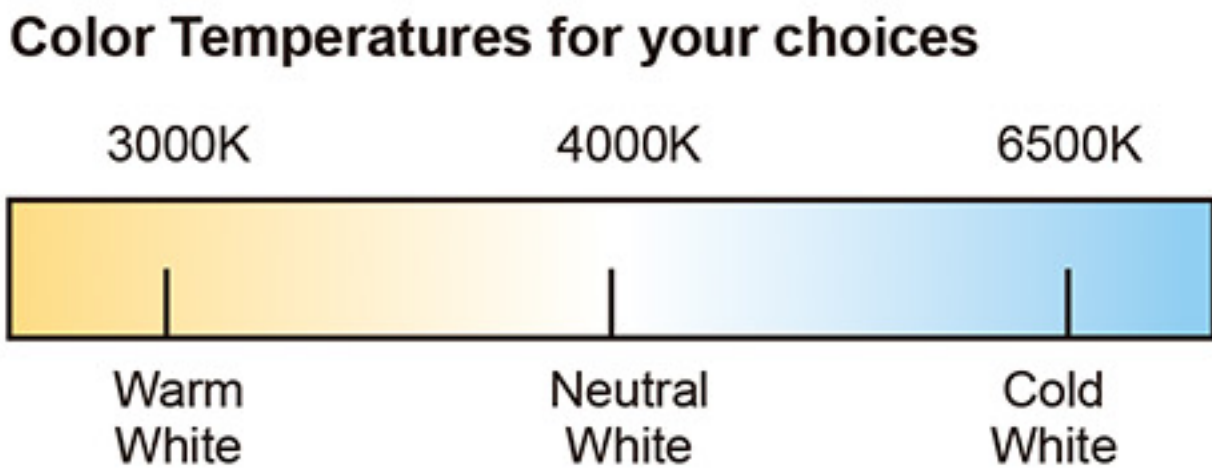

Model	Power	Lumen	Voltage	RA	Life time	SMD Chips	Lamp Size	Cut Hole Size
SL-SPLA-6W	6W	480 lm	85-265V	≥80	25000	2835×30pcs	120mm	120mm
SL-SPLA-9W	9W	720 lm	85-265V	≥80	25000	2835×40pcs	170mm	170mm
SL-SPLA-15W	15W	1200 lm	85-265V	≥80	25000	2835×80pcs	220mm	220mm
SL-SPLA-20W	20W	1600 lm	85-265V	≥80	25000	2835×100pcs	300mm	300mm

LED SURFACE PANEL LIGHT
SL-SPLA

85-265V~

RA > 80

90% Energy Saving

≥640lm

25000h

Eye-protection



LED PANEL-B Series




- Perfect shap and standard size
- World-class LED chips with superior lighting performance
- Eco-friendly, no mercury, no UV or IR radiation
- Safety use, flicker free and instant start
- High quality PC cover: high light emitting efficiency, no glare




LED ADJUSTED PANEL LIGHT

SL-PLB

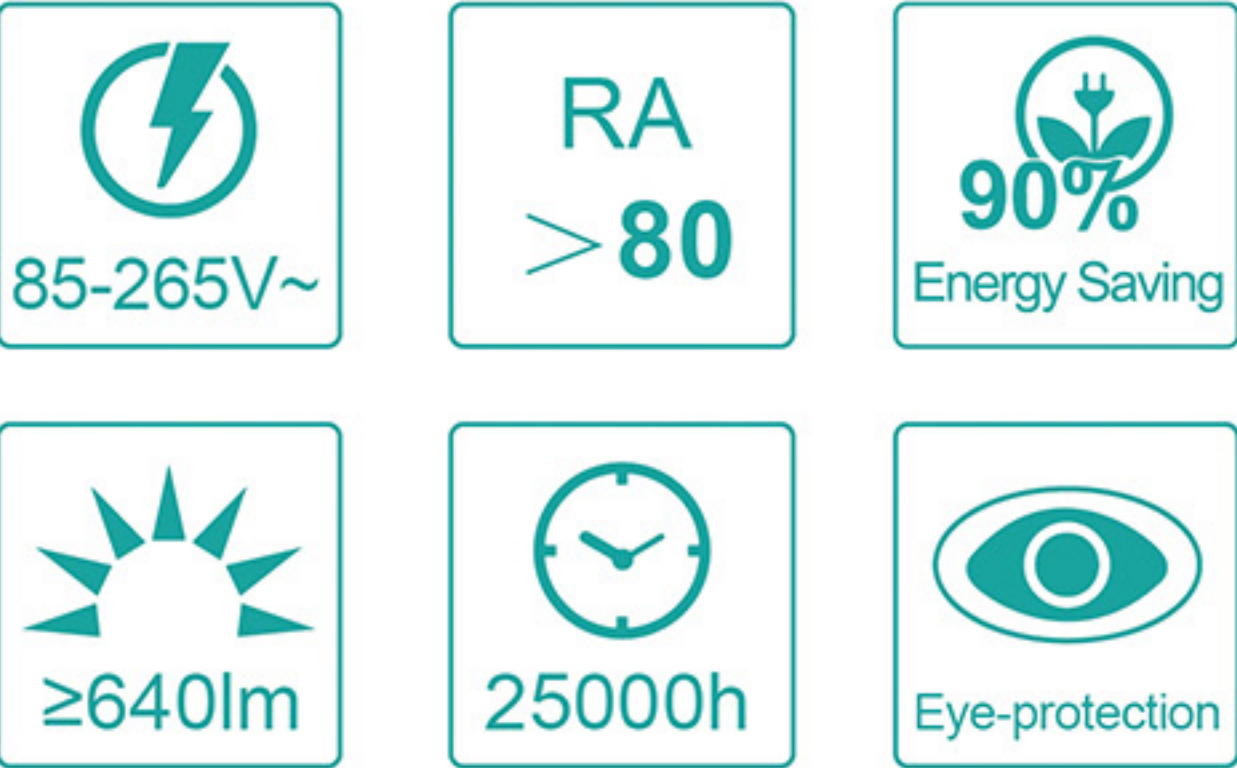


Color Temperatures for your choices

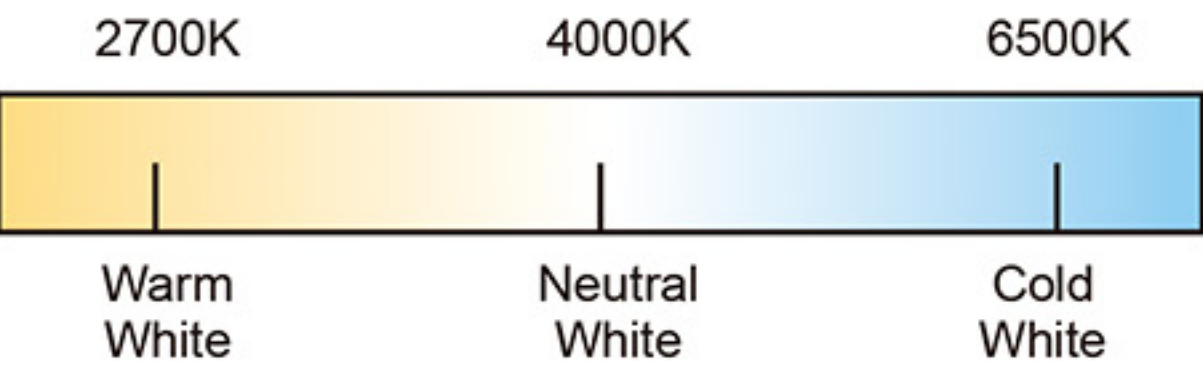


Model	Power	Lumen	Voltage	RA	Life time	Shape	Lamp Size	Install Hole Size
SL-PLB-3W	3W	250 lm	100-265V	≥80	25000	Round	Φ92×H40mm	Φ75mm
SL-PLB-6W	6W	450 lm	100-265V	≥80	25000		Φ104×H40mm	Φ85mm
SL-PLB-8W	8W	600 lm	100-265V	≥80	25000		Φ122×H40mm	Φ105mm
SL-PLB-12W	12W	900 lm	100-265V	≥80	25000		Φ148×H50mm	Φ130mm
SL-PLB-18W	18W	1400 lm	100-265V	≥80	25000		Φ172×H50mm	Φ155mm
SL-PLB-26W	26W	1950 lm	100-265V	≥80	25000		Φ225×H52mm	Φ210mm
SL-PLBS-3W	3W	250 lm	100-265V	≥80	25000	Square	92×92×40mm	75×75mm
SL-PLBS-6W	6W	450 lm	100-265V	≥80	25000		104×104×40mm	85×85mm
SL-PLBS-8W	8W	600 lm	100-265V	≥80	25000		122×122×40mm	105×105mm
SL-PLBS-12W	12W	900 lm	100-265V	≥80	25000		148×5148×0mm	130×130mm
SL-PLBS-18W	18W	1400 lm	100-265V	≥80	25000		172×172×50mm	155×155mm
SL-PLBS-26W	26W	1950 lm	100-265V	≥80	25000		225×225×52mm	210×210mm

LED SURFACE PANEL LIGHT

SL-SPLB

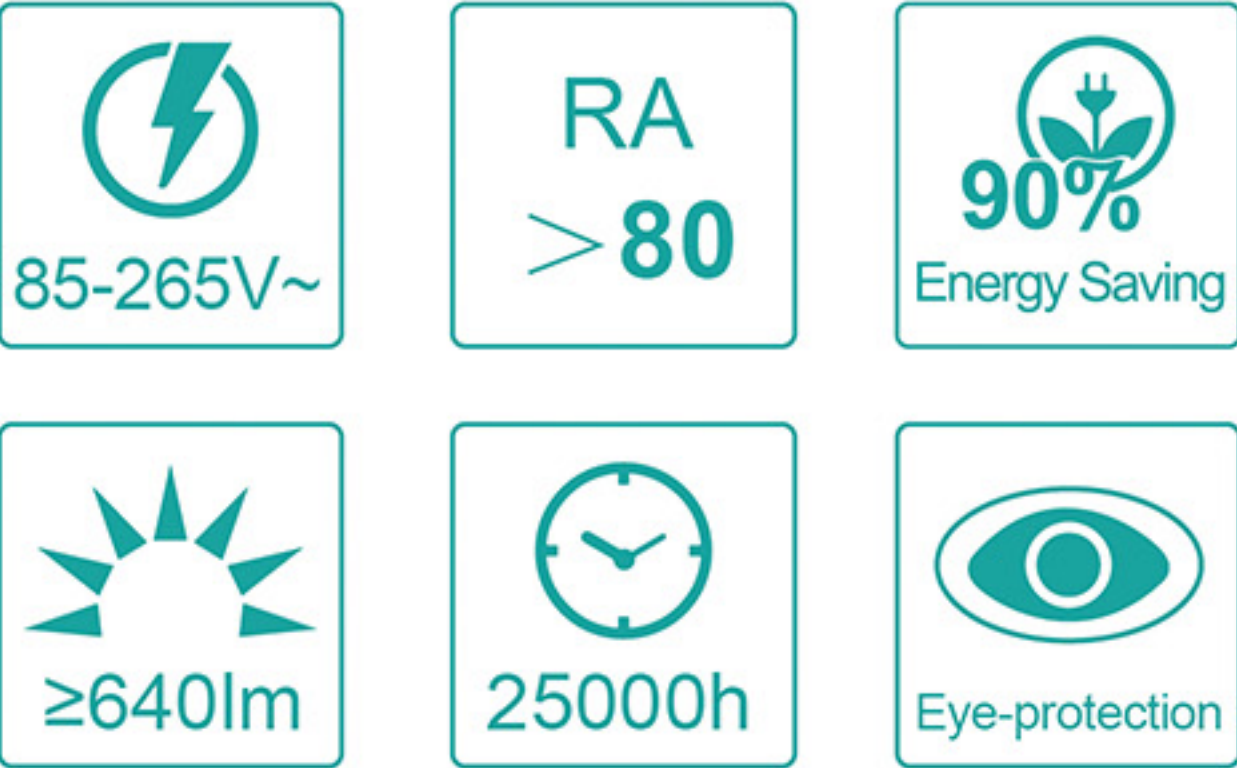

Color Temperatures for your choices

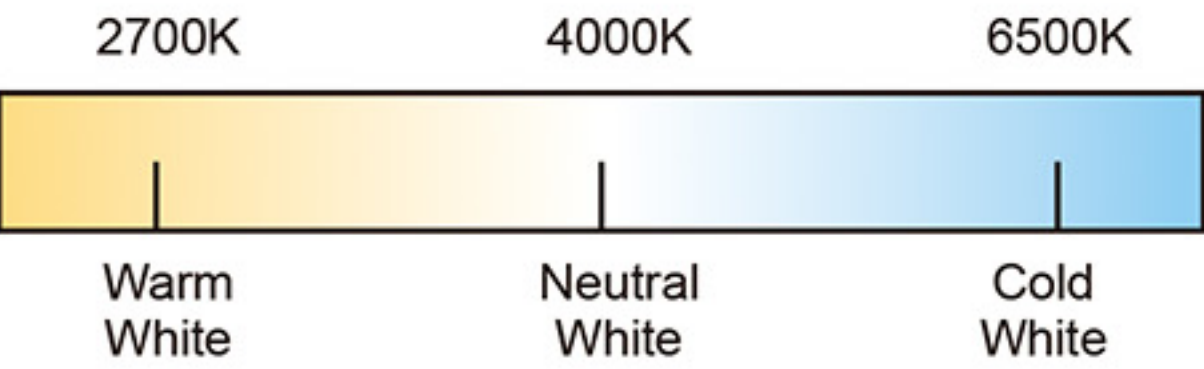

Model	Power	Lumen	Voltage	RA	Life time	Shape	Lamp Size	Install Hole Size
SL-SPLB-8W	8W	250 lm	100-265V	≥80	25000	Round	Φ122×40mm	Φ105mm
SL-SPLB-18W	18W	450 lm	100-265V	≥80	25000		Φ172×50mm	Φ155mm
SL-SPLB-26W	26W	600 lm	100-265V	≥80	25000		Φ225×52mm	Φ210mm
SL-SPLBS-8W	8W	250 lm	100-265V	≥80	25000	Square	122×122×40mm	105×105mm
SL-SPLBS-18W	18W	450 lm	100-265V	≥80	25000		172×172×50mm	155×155mm
SL-SPLBS-26W	26W	600 lm	100-265V	≥80	25000		225×225×52mm	210×210mm

