


SHINELITE SMART HOME

UK STANDARD CATALOGUE

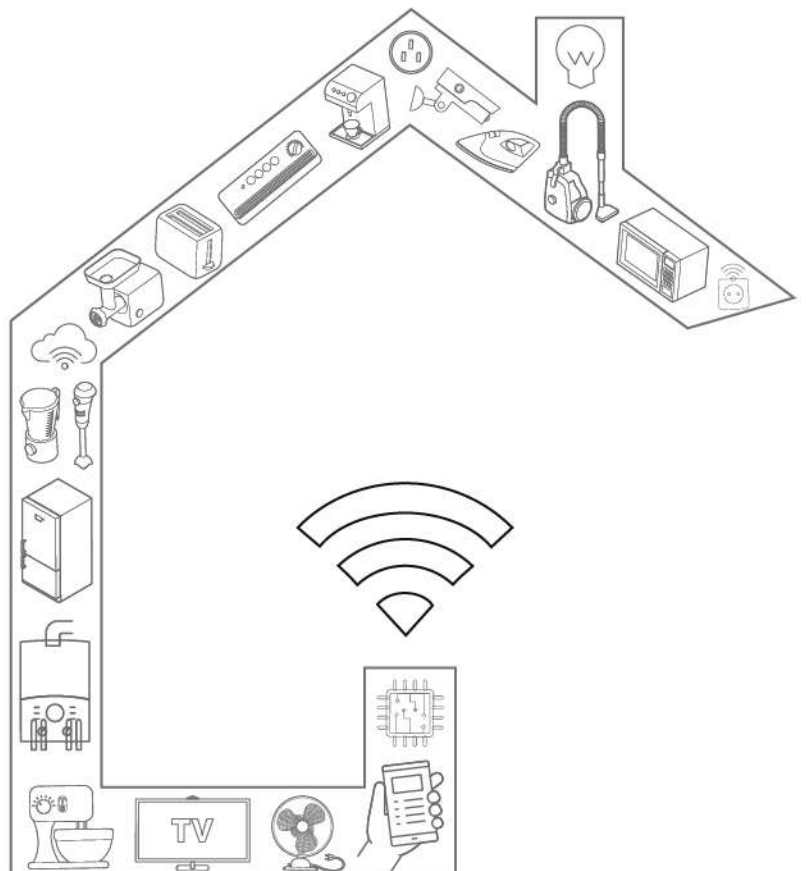


OEM & ODM Smart Home Products

Smart Wifi / Zigbee Switch, Smart PC Switch(Live-Live Wire),
Smart PC Switch(Live-Neutral Wire)



Alexa, turn on the living room light.

OK.




Voice Control


Work with Alexa and Google home




WIFI smart wall switch



WIFI Control



Timing Control




Power failure
protection




Voice Control



Smart Scenes



WIFI+Bluetooth
Dual module




Motor Reversal



Group Control



No.	Description	Input voltage	Power rating	Standby power	Operation Temperature	Plastic material	Housing Color
UKW01	WIFI switch 1 gang	200-240VAC	400W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey
UKW02	WIFI switch 2 gang	200-240VAC	400W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey
UKW03	WIFI switch 3 gang	200-240VAC	400W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey
UKW04	WIFI switch 4 gang	200-240VAC	400W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey

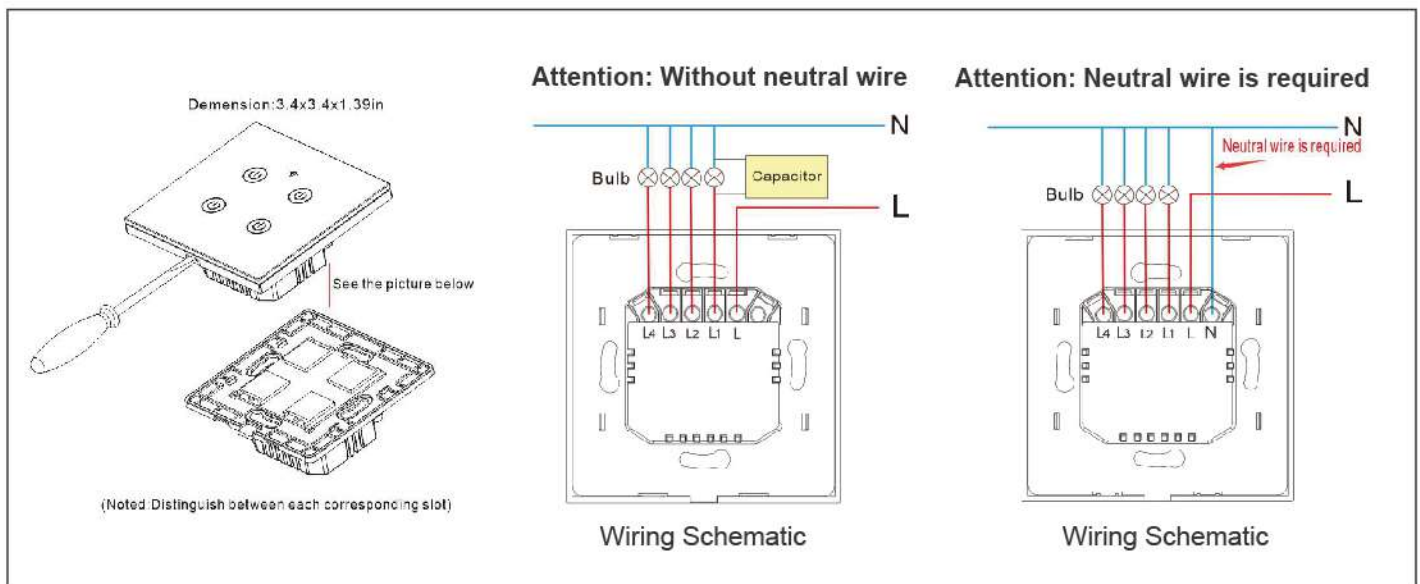

WIFI Fan switch

Technical Parameter

No.	UKF
Input voltage	100-240VAC 50/60Hz
Product	Fan switch
Power rating	0-400W
Standby power	0.5W
Size	86 * 86 * 35mm
Life	100000 times
Operation Temperature	-20℃ ~ +50℃
Fire-protection rating	94-V0



Dimmer switch



Technical Parameter

No.	UKDD
Input voltage	200-240VAC 50/60Hz
Product	DIMMER
Power rating	150W
Standby power	0.5W
Size	86 * 86 * 35mm
Life	100000 times
Housing Color	WHITE / BLACK / GOLD
Operation Temperature	-20℃ ~ +50℃
Fire-protection rating	94-V0

Compatible lamp:

Halogen lamp
Incandescent lamp
Dimmable LED lamp


Incompatible lamp:

Energy saving lamp
Fluorescent lamp
Normal LED lamp




Curtain switch

This switch can raise or lower you curtain,garage door,etc.



Technical Parameter

No.	UKDC
Input voltage	200-240VAC 50/60Hz
Networking	WIFI
Product	Curtain switch
Wi-Fi Band	2.4GHz / 2.4GHz & 5GHz
Power rating	mixed1800W
Standby power	0.5W
Size	86 * 86 * 35mm
Life	100000 times
Housing Color	White / Black / Gold
Operation Temperature	-20℃ ~+50℃
Plastic material	ABS
Fire-protection rating	94-V0

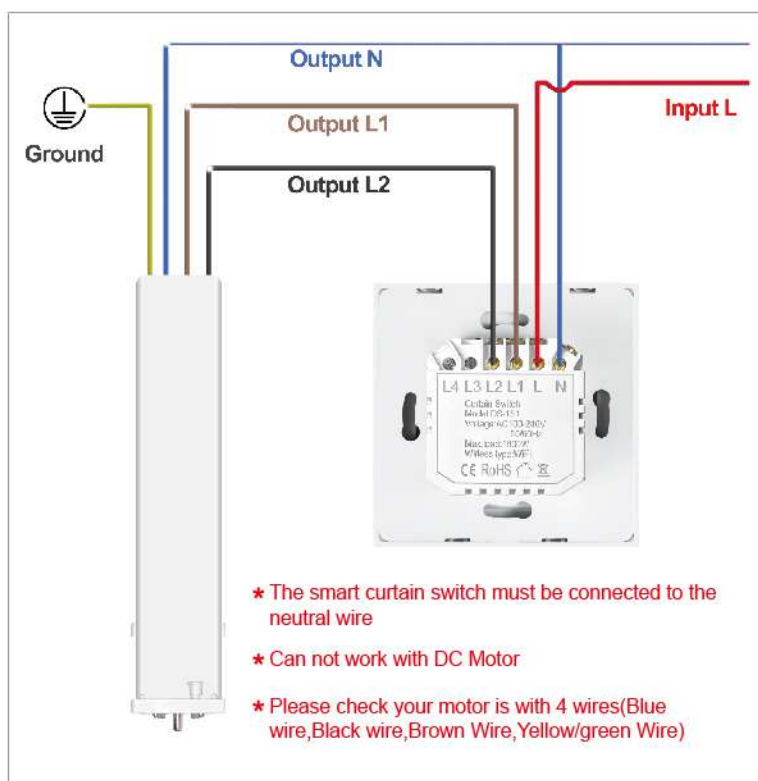



Boiler switch




Technical Parameter

No.	UK20
voltage	200-240VAC 50/60Hz
Networking	WIFI
Product	Water heater switch
Wireless Standards	IEEE802.11b/g/n
Power rating	4000W
Standby power	0.5W

Size	86 * 86 * 35mm
Life	100000 times
Housing Color	White / Black / Gold / Grey
Operation Temperature	-20℃ ~ +50℃
Plastic material	ABS
Fire-protection rating	94-V0

Wiring diagram

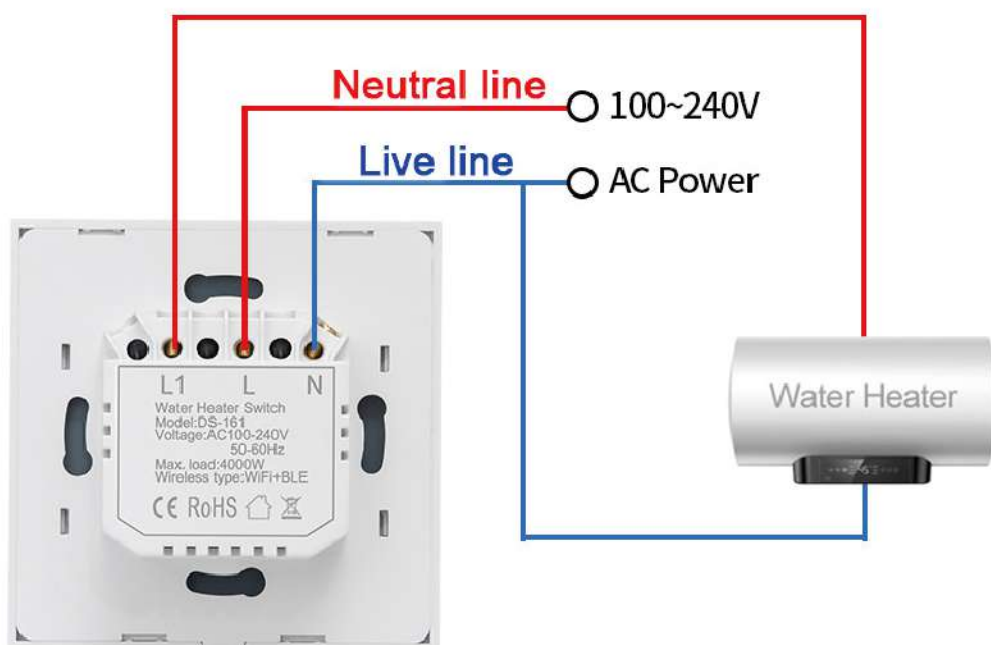

Resists deformation
and fading

Resists scratches
and scarring

Easy maintenance
and cleaning




No.	Description	Input voltage	Power rating	Standby power	Operation Temperature	Plastic material	Housing Color
UKFW01	WIFI switch 1 gang	200-240VAC	500W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey
UKFW02	WIFI switch 2 gang	200-240VAC	500W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey
UKFW03	WIFI switch 3 gang	200-240VAC	500W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey
UKFW04	WIFI switch 4 gang	200-240VAC	500W	0.5W	-20℃ ~+50℃	ABS+PC	white/ black/ gold/ grey


Technical Parameter




WIFI Control




Timing Control



Power failure
protection




Voice Control




Group Control



Smart Scenes



WIFI+Bluetooth
Dual module



Motor Reversal

Two metal frames for your choice



Silver metal frame



Golden metal frame



WIFI SMART BUTTON SWITCH

No.	Description	Rated Current	Input voltage	Power rating/gang	Standby power	Operation Temperature	Plastic material	Color
UKDA01	WIFI switch 1 gang	10A	100-240VAC	600W/gang	0.5W	-20℃ ~+50℃	ABS+PC	white
UKDA02	WIFI switch 2 gang	10A	100-240VAC	600W/gang	0.5W	-20℃ ~+50℃	ABS+PC	white
UKDA03	WIFI switch 3 gang	10A	100-240VAC	600W/gang	0.5W	-20℃ ~+50℃	ABS+PC	white



High Quality

ABS+PC fireproof with premium PCB

- Short circuit protection
- Overvoltage protection
- Over temperature protection
- Overcurrent protection



1 gang 1/2 way



2 gang 1/2 way




3 gang 1/2 way



WIFI Control



Timing Control



Power failure protection



Group Control




Smart Scenes




Motor Reversal

Wiring diagram

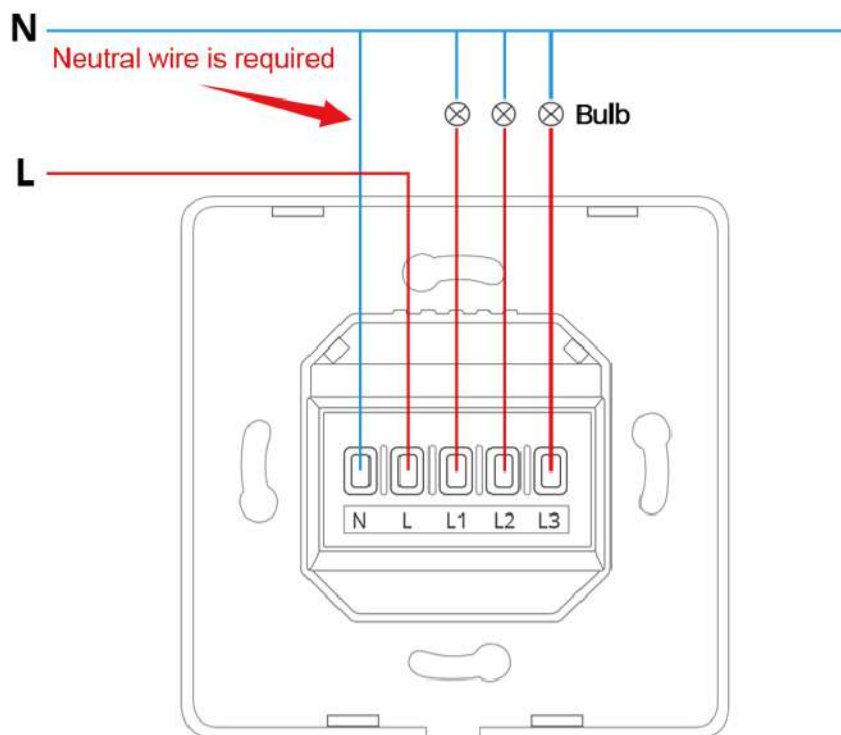

Neutral Line Needed Mode

10mm 32mm

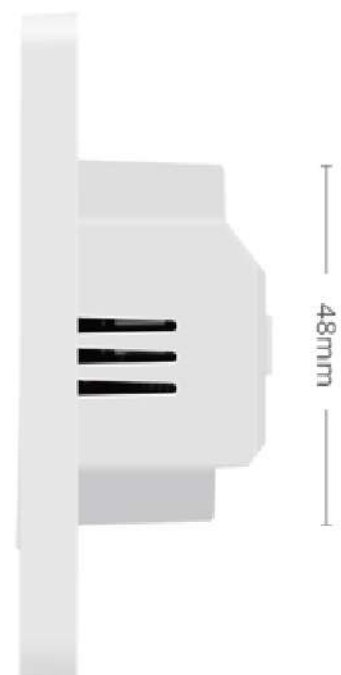

Intelligently control the device after connecting it to most ZigBee hub, Tuya ZigBee hub required for its much more compatibility with zigBee devices than other hubs.

Voltage	200-240VAC 50/60Hz
Networking	WIFI
Product	Water heater switch
Networing	zigbee
Power rating	200W
Rated current	10A

11




zigbee hub
(for ZigBee version only)



- Add device to your Smart Life App to get multiple control ways for controlling with your family together.

zigbee hub



Support control one device via many phones by signing in the same account in different phones.

WIFI smart socket



WIFI 5 Pin Multi-function switched socket



UKWS03U



UKBS03U

Technical Parameter

Dimension: 86*86*40MM

Operating voltage: 110V-240V/50-60HZ

Wall socket load: 15A

Frequency: Wifi 2.4G

Wireless Fidelity: 802.11b/g/n

WIFI 2 gang switch socket with 2 USB



Dimension: 147*86*42MM

Operating voltage: 110V-240V/50-60HZ

Wall socket load: 15A

USB 2.0 5V 4A



WIFI 8 gang switch



UKW8W



UKW8B

Technical Parameter

Dimension: 147*86*42MM

Operating voltage: 110V-240V/50-60HZ

Rated load: 1000W/Gang

Frequency: Wifi 2.4G

Wireless Fidelity: 802.11b/g/n

WIFI 4 gang switch with Fan switch



UKW04-FW



UKW04-FB

Technical Parameter

Dimension: 147*86*42MM

Operating voltage: 110V-240V/50-60HZ

Rated load: 1000W/Gang

Fan load: <600W

Frequency: Wifi 2.4G

Wireless Fidelity: 802.11b/g/n

Alexa
discover my devices

WIFI Plug

Control your household
appliances anywhere anytime

voltage	110-240VAC
Wireless Standards	Wi-fi2.4GHz
Max Current	16A
Size	55*55*55 mm
Max Power	2400W
Housing Color	White
Product Material	ABS



Product Analysis





UK WIFI Plug



Australia WIFI Plug



EU WIFI Plug



US WIFI Plug



South Africa WIFI Plug




Brazil WIFI Plug



Italy WIFI Plug



France WIFI Plug

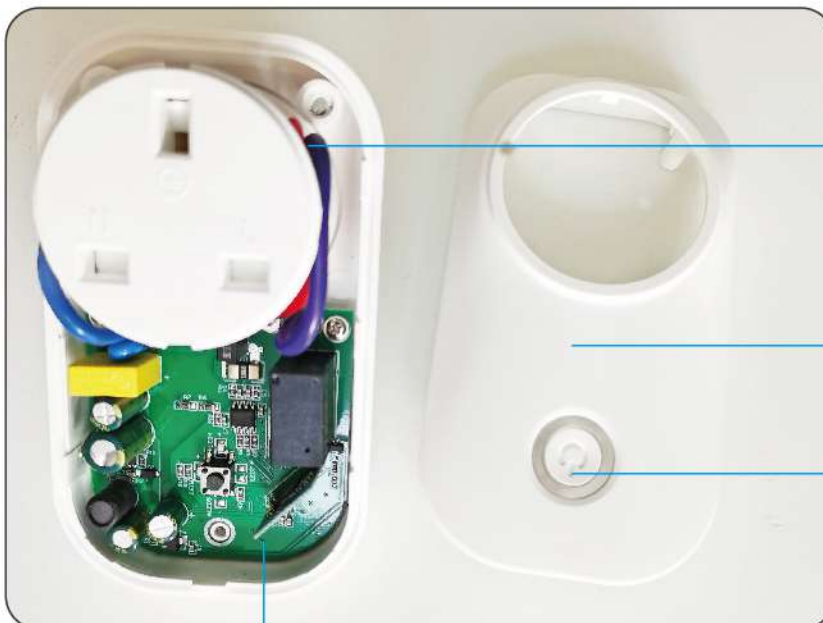


Phosphor
Bronze Contacts

ABS Flame
Retardant Materials

Turn ON/OFF Button

Premium PCB Board

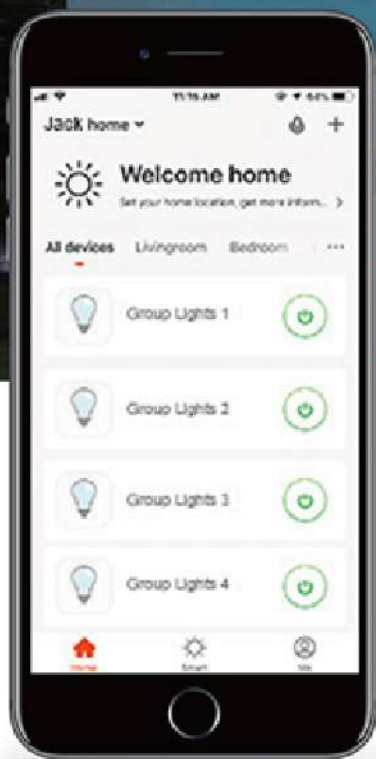

WIFI RGB LED BULB

Different colors can be selected to adjust the atmosphere according to different environments



RGBW



APP Control



Timer



Voice Control

Technical Parameter

Voltage	220-240VAC
Wireless Standards	Wi-fi2.4GHz
Luminous Flux	806LM
Color	RGB+CW
Max Power	9W
Lamp holder	E27
Product Material	Plastic

*** 7W / 9W / 10W for your choice**




AP Mode Configuration:

1. Please open the WLAN setting page of your iPhone to find and connect the WiFi hotspot named as Homekit_XXXX.

After about 3s, WiFi configuration interface will pop up automatically.

2. Please choose your home WiFi signal name in the pop-up window, key your password and click "Join". After the WiFi configuration interface has skipped to the wifi list page, please make sure that the smart LED bulb always lights.


Note: If the smart LED bulb is not at the default factory mode (i.e., red-green-blue-white-always light), please power on the smart LED bulb three times, repeatedly, to let bulb at factory mode.

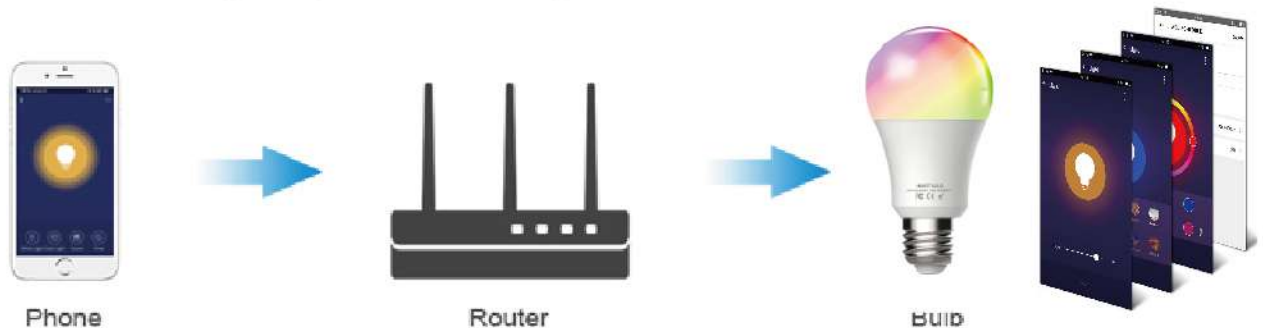

2700K-6500K Color Temperature

Warm or Cold Adjusted by Yourself



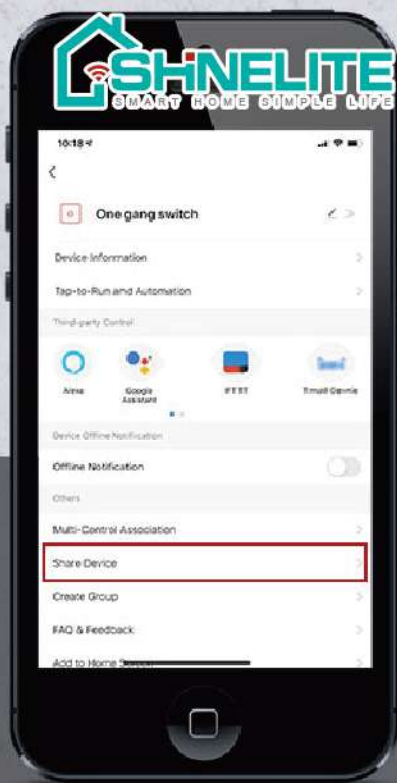

Multi-mode Gateway

- Add device to your Smart Life App to get multiple control ways for controlling with your family together.



zigbee hub
(for ZigBee version only)

Technical Parameter

Standby quantity	45 devices
Coverage Distance	30 Meters
Size	60*60*15mm
Electrical parameters	5V 1A

Operating temperature	-10~45℃
Operating humidity	5%~90%RH Non-condensing
ZigBee Protocol	802.15.4
Wireless Protocol	802.11 b/g/n

WIFI Switch Module



Technical Parameter

Input voltage	100-240V 50/60HZ
Rated current	Max 10A
Product size	47.3*47.3*20mm
Button life	100,000 times
Plastic material	ABS
Fire rating	94-VO
Wireless standard	IEEE802. 1 1b/g/n, 2. 4GHZ
APP	Smart Life/TUYA Smart



WIFI DIY Switch Module

Working voltage	AC90-250V 60HZ/50HZ
Wireless standard	IEEE 802.11 b/g/n
Maximum current	<10A
Product size	90*38*22(mm)



ACCESSORIES



UKB438
1 gang telephone socket



UKB442
1 gang RJ45 data socket



UKB432
coaxial socket



UKB440
2 gang telephone socket



UKB443
2 gang RJ45 data socket



UKB432
1 gang RJ45 data socket
+coaxial socket



UK805
47mm 86 cavity box



UK810
50mm 147 cavity box



Shanghai Shinelite Electric Co.,Ltd.

Headquarters

No. 2588 Jinhai Road, Pudong New Area, Shanghai, China

Tel: (86)21-58990776

Fax: (86)21-58990776

Email: service@shinelite.cc

Web: www.smartshinelite.com